

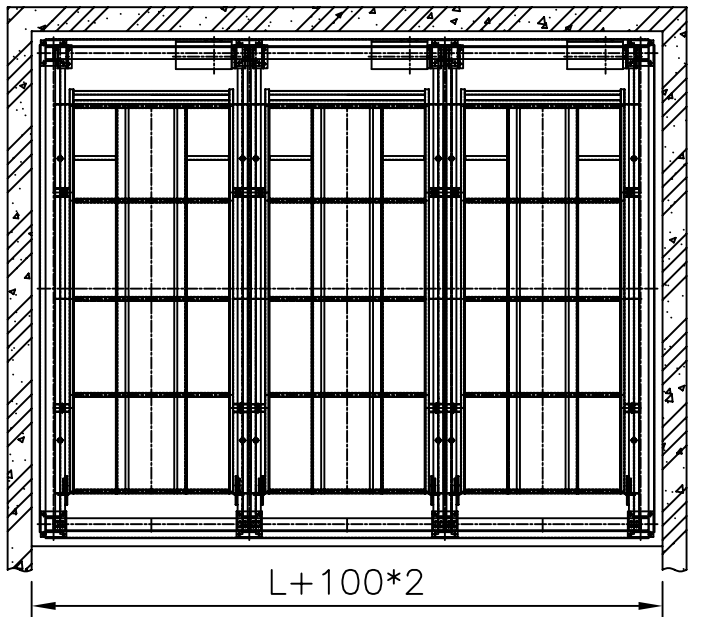


7 LAYER TYPE (VERTICAL/HORIZONTAL SYSTEM ; PIT, NIRMAL or LARGE SIZED CAR)

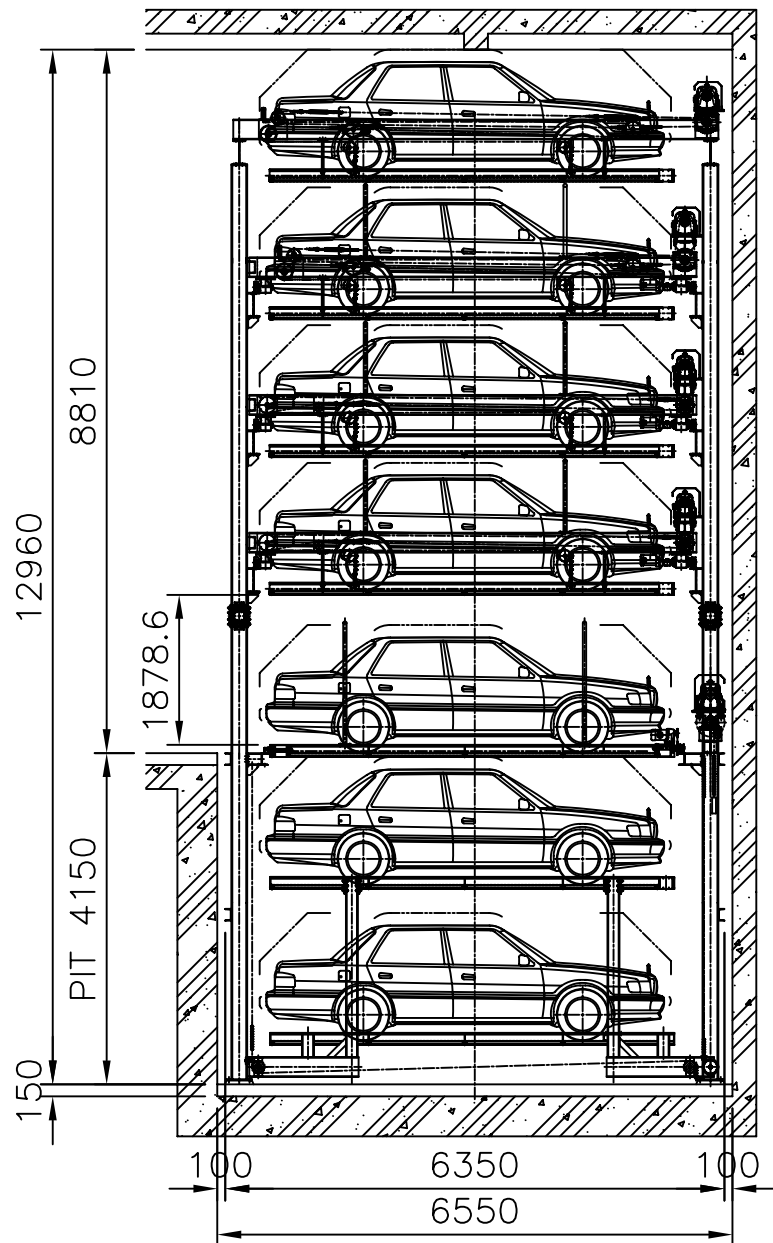

Standard Specification

Model	7 layer type (PIT)		
Acceptable spec.	length	5120	MM
	width	2060	MM
	height	1550	MM
	weight	2100	KG
PIT Vertical/Horizontal	Motor	5.5Kw x 4P	
	Speed	4 M/MIN	
2F,3F,4F,5F Vertical/Horizontal	Motor	3.7Kw x 4P	
	Speed	5 M/MIN	
1F,2F,3F,4F Travelling	Motor	0.4Kw x 4P	
	Speed	10 M/MIN	
Power	AC220/380V,60Hz,36-4W+E		
CONTROL	P. L. C		

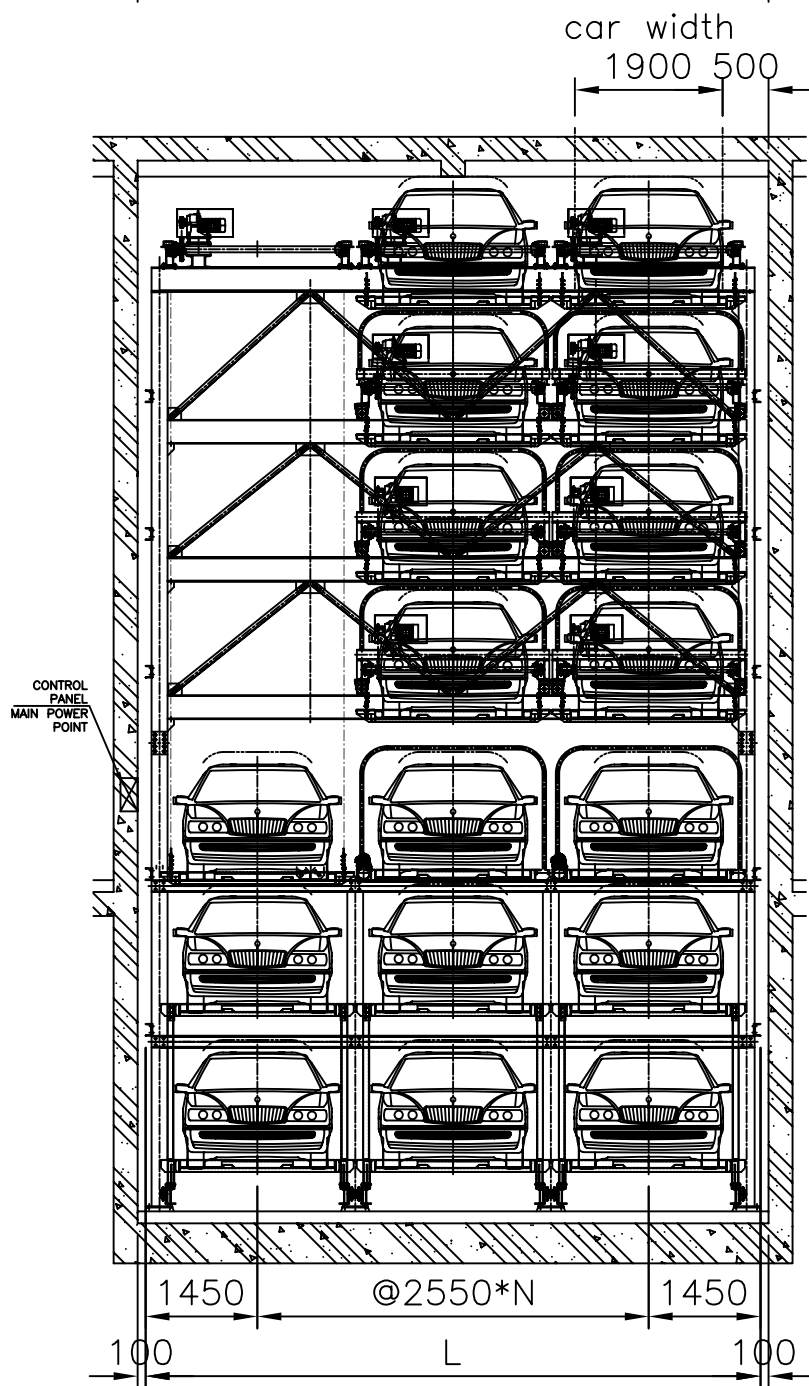

standard dimensions

N	1	2	3	4	5	6	7	8
capacity	10	17	24	31	38	45	52	59
L (MM)	5450	8000	10550	13100	15650	18200	20750	23300
N	9	10	11	12	13	14	15	16
capacity	66	73	80	87	94	101	108	115
L (MM)	25850	28400	30950	33500	36050	38600	41150	43700

* If different standard spec. from structure's, required to contact us
 * RV is excluded, required to contact us

Remarks

1. If you need to set sprinkler, please contact to us
2. Possible to anchor in the base of parking lot and wall Required to construct trench (to flow water) without intervention in the base of metal frame
3. Required to set ventilation system
4. Main power dragging to control panel
5. Required to set lighting and electricity system in underground.
6. Required to set safe handrail or security fence at other sides except front side.